



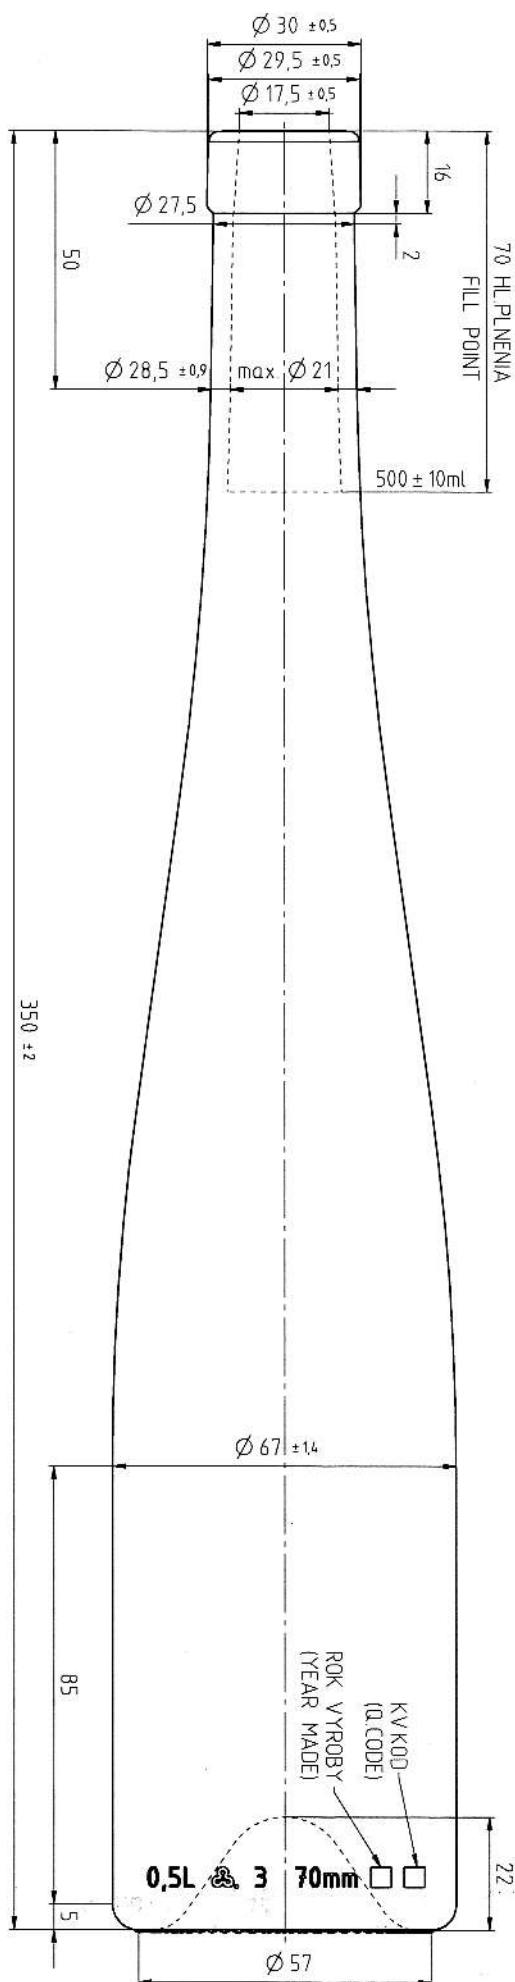


POHLAD DO DNA
(BOTTOM VIEW)

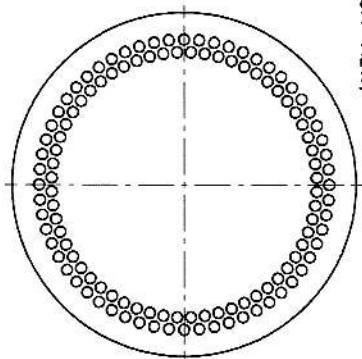

BODKOVY KOD
(DOT CODE)

CISLO FORMY
(MOULD NUMBER)

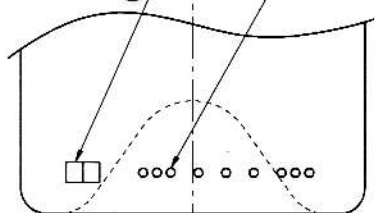

INDEX	ZMENY / modifications	DAF	MEMO	SÚHLAS TECHNICKÁ PT approval				DAF	VIS	TEPLOTA PLOCHNA Flang temperature	≤ 15 °C	MINIMÁL. OBJEM Capacity fillpoint	500 ml ± 10 ml	POZNÁMKY Remarks
				SÚH VYFRTYMU Fib released				DAF	VIS	TEPLOTA SPRACOVANIA Conditioning temperature	≤ °C	TOTÁL. OBJEM Capacity brimful	521 ml ±	
				VYR 2A000 VPN				DAF	VIS	OBSAH O ₂ , O ₂ content	≤ g/l	PRÍRUST Approx. glass weight	500 g	
				VYR 2A000 DAF				VIS	OBSAH ALKOHOLU Alcohol content	≤ 14 vol%	STREMA, HĺBKBA, STENY Average wall thickness	mm	POUŽITÝ AKO similar to	
				VYR 2A000 DAF				VIS						
				NETOLEROVANE ROZMERY PODLA DIN 6179 dimensions without tolerances conform to standard DIN 6179				AVALUJE ZARAZENIE Avail. pressure						
				POUZITIE Disposal				MM	AW	EW		VAJUTOVY PRIMER KALUBRA Min. through bore	16,5 mm	
				PRACIES Process				BB	PG	EPD		BARBA Color	WE	
								PREPRER POU USTPM Neck connection dia.				27,5 mm		
								MEKKA Scale				1 1		
								KRESLIL Date				Sep		
								DAF 03.08.09						
								DAF TYP AZ						
								YVROBK POU Item No				7W109 0500 0101		
								BELVEDERE OBM 0,5L						
								MAZOV VYROBKU Designation						
								VETROPACK Nemstovl s r o SK-914A1 Nemstovl Tel: 00421-032 6557 111 www.vetropack.com						
														
								INDEX A						